



ASHOK LEYLAND

Koi Manzil Door Nahin

4225 | 4425
4x2 TRACTOR

**BUILD YOUR
OWN TRUCK**



Best-in-class
fluid efficiency



Superior Tyre
Mileage



Higher Reliability &
Low Maintenance Cost



Better Productivity &
Performance



Higher Safety



Cabin Options and
Comfort features



Overall TCO
advantage




HINDUJA GROUP


SPECIFICATIONS

Engine type	A series BS-VI with i-Gen6 technology
Max power	185 kW @ 2200 rpm
Max Torque	900 Nm @ 1100 - 1800 rpm
Clutch	395 mm dia - with air assisted hydraulic booster
Gearbox	9 speed synchromesh gearbox
Front axle	Forged I section - Reverse Elliot type
Rear axle	Fully floating single speed rear axle,
Front suspension	Parabolic springs Optional: Semi-elliptic multi leaf
Rear suspension	Semi-elliptic multi leaf with parabolic helper springs
Chassis frame	HSS material with new improved design
Brakes	Full air dual line brakes with ABS
Fuel tank	Cross linked polymer Capacity: 375 L on LH side
DEF tank	48 L
Max speed	80 kmph
Electricals	24 V - 120 Ah (150 Ah for AC Models)
Tyres	11 R 20
Cabin	N - Premium cabin (AC optional)
Vehicle configuration options	Cabin & chassis
Wheelbase	3400 mm
Overall dimension	L - 5950 mm W- 2570 mm H - 3177 mm
Chassis weight (Laden)	FAW - 7,000 kg; RAW - 11,500 kg; GCW - 41,500 kg/ 43,500 kg (when coupled with suitable 2 axle trailer as per CMVR)

SCHEMATIC LAYOUT

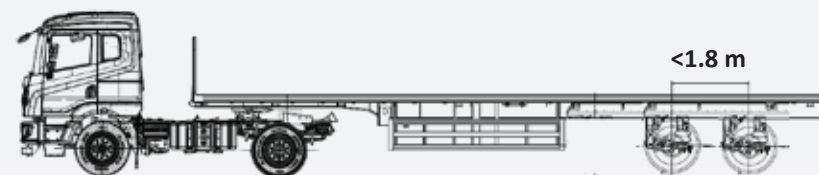

4225 - with pneumatic suspension in trailer

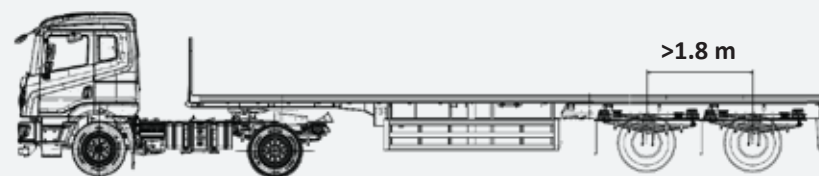

4225 - with mechanical suspension in trailer



4425 - with pneumatic suspension in trailer

Illustrations are for reference only

APPLICATIONS



Container



LPG bullet



Market load

IALERT RECON AMC ALCARE LEYPARTS® HELPLINE

LEYKART DRIVER TRAINING TECHNICAL TRAINING

ASHOK LEYLAND
Koi Manzil Door Nahin

Registered Office - Ashok Leyland Limited, No. 1, Sardar Patel Road,
Guindy, Chennai - 600032, Tel. - 91 44 2220 6000
E-mail - reachus@ashokleyland.com | Website - www.ashokleyland.com

HELPLINE
1800-266-3340

AUTHORISED DEALER