



ASHOK LEYLAND

Koi Manzil Door Nahin

4X2 TRACTOR
5225 | 5425 | 5525

**BUILD YOUR
OWN TRUCK**



Best-in-class
fluid efficiency



Superior Tyre
Mileage



Higher Reliability &
Low Maintenance Cost



Better Productivity &
Performance



Higher Safety



Cabin Options and
Comfort features



Overall TCO
advantage




HINDUJA GROUP

SPECIFICATIONS


Engine type	A series BS-VI with i-Gen6 technology	H series BS-VI with i-Gen6 technology
Max. power	185 kW @ 2200 rpm	184 kW @ 2400 rpm
Max. torque	900 Nm @ 1100-1800 rpm	900 Nm @ 1200-1900 rpm
Clutch	395 mm dia - with air assisted hydraulic booster	
Gearbox	9 speed synchromesh gear box	
Front axle	Forged I section- reverse Elliot type	
Rear axle	Fully floating single speed rear axle	
Front suspension	Parabolic springs Optional: Semi-elliptic multi leaf	
Rear suspension	Semi-elliptic multi leaf with parabolic helper springs	
Chassis frame	HSS material with new improved design	
Brakes	Full air dual line brakes with ABS	
Fuel tank	Cross linked polymer Capacity: 375 L on LH side	
DEF tank	48 L	
Max speed	80 kmph	
Electricals	24 V -120 Ah (150 Ah for AC Models)	
Tyres	295/ 90R20	
Cabin	U -Value cabin and N - Premium cabin; AC option on U and N variants	
Vehicle configuration options	Cabin and chassis	
Wheelbase	3400 mm	
Turning circle diameter	12.6 m	
Overall dimensions	L - 5950 mm W - 2570 mm H - 3247 mm (U cabin) 3177 mm (N cabin)	
Chassis weight (Laden)	GCW: 52,000 kg / 54,000 kg / 55,000 kg (when coupled with suitable 3 axle trailer)	

SCHEMATIC LAYOUT


5225

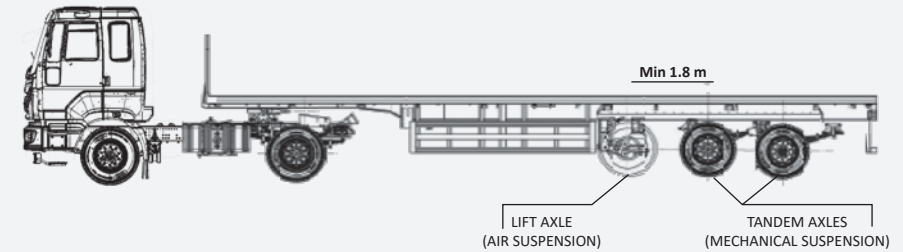

5425

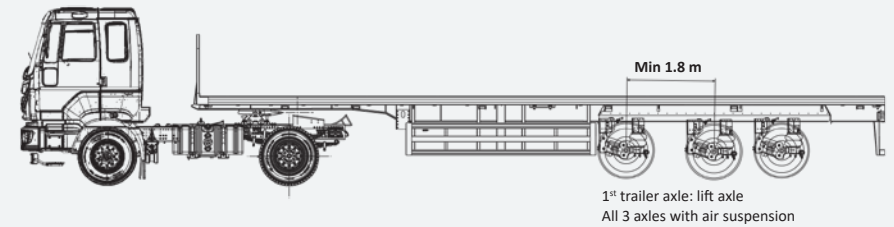

5525

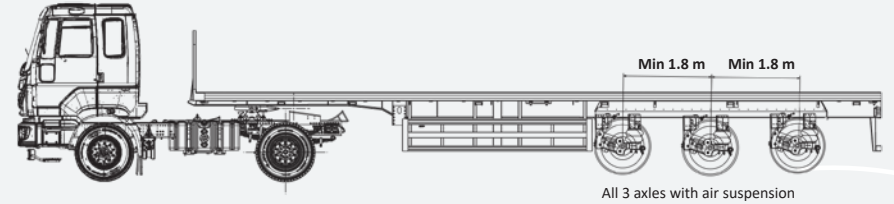

Disclaimer: trailers to be fabricated as per CMVR to get the desired GCW

APPLICATIONS



Tankers



Bulker



Steel



Cement



Containers



Market load

ASHOK LEYLAND
Koi Manzil Door Nahin

Registered Office - Ashok Leyland Limited, No. 1, Sardar Patel Road,
Guindy, Chennai - 600032, Tel. - 91 44 2220 6000
E-mail - reachus@ashokleyland.com | Website - www.ashokleyland.com

HELPLINE
1800-266-3340

AUTHORISED DEALER